


AEROLUX CLIMBABLE POLES ROUND CONICAL

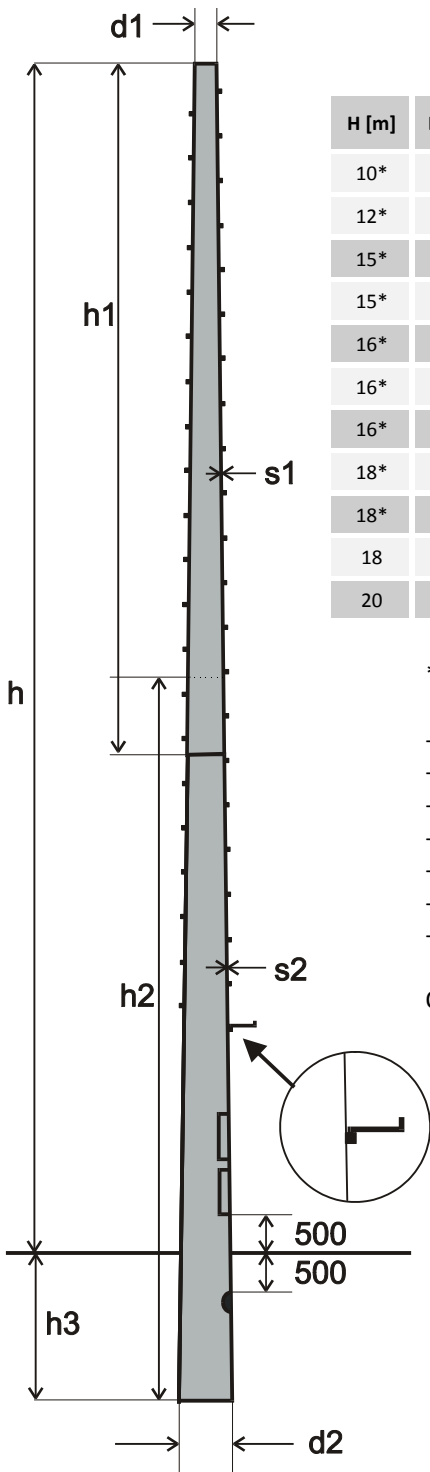

H [m]	Door	Fl.	h1 [m]	h2 [m]	h3 [m]	s1 [mm]	s2 [mm]	d1 [mm]	d2 [mm]	M [kg]	Type
10*	1	2	10.0	-	1.5	4	-	108	223	191	SM 100.1
12*	1	2	12.0	-	1.5	4	-	108	260	249	SM 120.1
15*	1	2	5.9	11.0	2	3	4	101	250	264	SM 150.1
15*	2	4	5.9	11.0	2	3	4	101	250	280	SM 150.2
16*	1	2	9.25	9.25	2	3	4	101	257	293	SM 160.1
16*	2	4	9.25	9.25	2	3	4	101	257	311	SM 160.2
16*	3	6	9.25	9.25	2	4	4	108	291	407	SM 160.3
18*	1	2	8.3	12	2	3	4	101	280	364	SM 180.1
18*	2	4	10.0	10.0	2	4	4	108	309	429	SM 180.2
18	3	5	10.25	10.25	2	4	4	108	333	475	SM 180.3
20	3	5	11.25	11.25	1.8	4	4	108	360	550	SM 200.3

*= available from stock

- produced according to standard EN 40
- strength calculated according to standard EN 1990/1991
- fully hot-dipped galvanised steel
- equipped with bushes for detachable climbing rungs
- equipped with 2 cable entry holes
- equipped with extra large door(s) 600x140 mm
- suitable for built-in ballast-units in pole

Other types on request

Aerolux International BV
P.O. Box 48, 7570 AA Oldenzaal, The Netherlands
T 0031 541 570357
F 0031 541 570358
E info@aerolux.com
I www.aerolux.com



AEROLUX INTERNATIONAL
lighting technology