


## AEROLUX STEEL TAPERED POLES ROUND CONICAL

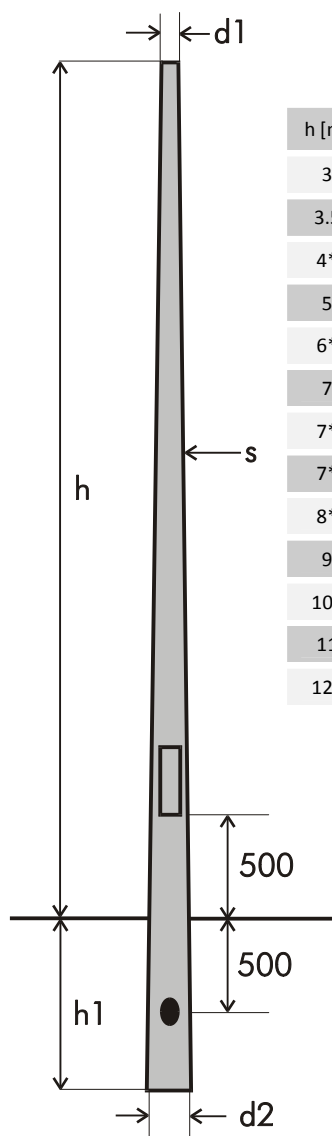

h [m]	Door	h1 [m]	s [mm]	d1 [mm]	d2 [mm]	M [kg]	Type
3	80x400	0.7	3	60	123	26	M60.030.3
3.5	85x400	0.7	3	60	132	31	M60.035.3
4*	85x400	0.8	3	60	124	34	M60.040.3
5	85x400	0.8	3	60	130	42	M60.050.3
6*	85x400	1.0	3	60	133	51	M60.060.3
7	100x400	1.0	3	76	159	72	M76.070.3
7*	130x600	1.2	3	60	200	80	M60.070.3SP
7*	130x600(2x)	1.2	4	76	217	127	M76.070.4SP
8*	100x400	1.2	3	76	172	87	M76.080.3
9	100x400	1.5	3	76	181	104	M76.090.3
10*	100x400	1.5	3	76	196	119	M76.100.3
11	100x400	1.5	4	76	201	172	M76.110.4
12*	100x400	1.7	4	76	213	196	M76.120.4

\*= available from stock

- produced according to EN 40
- strength calculated according to EN 1990/1991
- fully hot-dipped galvanised
- equipped with cable entry hole

Other types on request

Aerolux International BV  
P.O Box 48, 7570 AA Oldenzaal, The Netherlands  
T 0031 541 570357  
F 0031 541 570358  
E [info@aerolux.com](mailto:info@aerolux.com)  
I [www.aerolux.com](http://www.aerolux.com)



**AEROLUX INTERNATIONAL**  
lighting technology